RB-GINS-v1

POSITIONING · RTK

Positioning module integrating RTK, Wi-Fi and a battery — supply configuration proposed per project

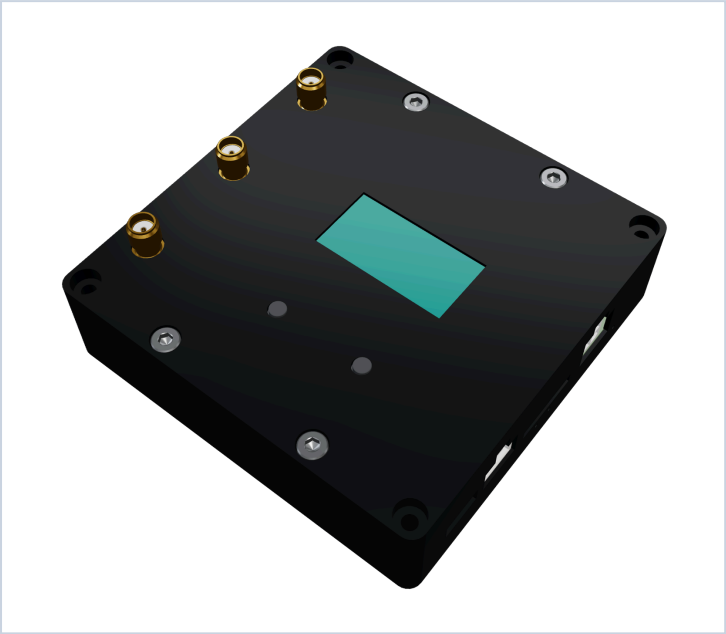

Representative image · rendered from the website assembly 3D model

Quotation on request · supply configuration proposed per project

Key features

- **RTK positioning**
  Positioning module for projects that need position coordinates — a different role from an attitude (AHRS) sensor
- **Wi-Fi + battery integrated**
  Communication and power integrated in the module (per website product data)
- **Per-project supply configuration**
  Antenna placement, reception environment, correction data and communication are discussed before a configuration is proposed

Form · interface · sensor configuration

Form	Positioning module (housed) · business quotation
Configuration	RTK · Wi-Fi + BATTERY (website product data)
Interface · power · pinout	Configuration consultation based on project requirements
Dimensions	Drawings provided when the supply configuration is confirmed

Application examples

- Projects that need position coordinates — separate position requirements from attitude measurement and discuss the complete configuration
- RTK evaluation — plan with antenna placement, reception environment, correction data and communication included
- Evaluation plan — define required outputs, error limits, reference instrument, environment and pass criteria first (criteria are targets, not measured results)

Downloads · inquiry

Product page

Product page robor.co.kr/product-info/en/rb-gins-v1.html
Manuals · downloads robor.co.kr/downloads/
Quotation and supply schedule inquiry robor.co.kr/inquiry.html

Availability: Quotation on request · supply configuration proposed per project

See the model manual for power, pinout, connection requirements and detailed specifications. Application examples support configuration planning. Contact ROBOR for pricing and supply schedules.

© 2026 ROBOR Co., Ltd. All rights reserved.